

Pose Changes From a Different Point of View

Gregory S. Chirikjian*

Department of Mechanical Engineering
Johns Hopkins University
Baltimore, Maryland, USA 21218
Email: gchirik1@jhu.edu

Robert Mahony

College of Engineering and Computer Science
The Australian National University
Canberra, ACT, 2601, Australia
Email: robert.mahony@anu.edu.au

Sipu Ruan

Department of Mechanical Engineering
Johns Hopkins University
Baltimore, Maryland, USA 21218
Email: ruansp@jhu.edu

Jochen Trumpf

College of Engineering and Computer Science
The Australian National University
Canberra, ACT, 2601, Australia
Email: jochen.trumpf@anu.edu.au

ABSTRACT

For more than a century, rigid-body displacements have been viewed as affine transformations described as homogeneous transformation matrices wherein the linear part is a rotation matrix. In group-theoretic terms, this classical description makes rigid-body motions a semi-direct product. The distinction between a rigid-body displacement of Euclidean space and a change in pose from one reference frame to another is usually not articulated well in the literature. Here we show that, remarkably, when changes in pose are viewed from a space-fixed reference frame, the space of pose changes can be endowed with a direct product group structure, which is different than the semi-direct product structure of the space of motions. We then show how this new perspective can be applied more naturally to problems such as monitoring the state of aerial vehicles from the ground, or the cameras in a humanoid robot observing motions of its hands.

1 Introduction

In elementary courses on manipulator kinematics, students learn that the motion from A to B (as seen in A) can be expressed as a homogeneous transformation, written here as ${}^A H_B$, and likewise from B to C . They also learn that the concatenation of rigid-body motions when going from frame A to C is then the product of these transformations, ${}^A H_C = {}^A H_B {}^B H_C$, and that ${}^A H_B^{-1} = {}^B H_A$. In addition, they learn that the spatial transformation describing this relative motion from A to B (as seen in A) is ‘the same’ as the transformation that converts the coordinates of position vectors seen relative to B back

*Address all correspondence to this author. This manuscript is an extended version of the conference paper (ID: DETC2017-67725) presented in ASME IDETC 2017, Cleveland, OH.

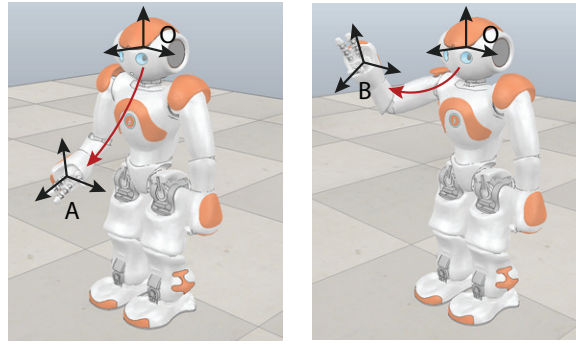


Fig. 1: Demonstrating the three frame scenario with a separate observer frame O for a Humanoid Robot

into the coordinates of the same positions as seen in A . This is a natural description of motion for serial kinematic structures, as put forth in [14]. This sequential mechanical view of kinematics has proved its worth over many years, however, it is inherently based on a confounding of the role of coordinates and spatial transformations.

In this paper we consider the question of how to properly model motion between two poses when considered from a third point of view corresponding to an observer. This scenario is depicted in the context of a humanoid robot in Fig. 1 in which frames A and B describe the pose of the robot's hand at two different times, and O is the frame attached to the head where the visual sensors of the robot are placed. A similar scenario arises in the ground-based remote control of aerial vehicles, in which case O would be the ground frame. A key contribution of the paper is to show that (at least in many robotics applications) such motion should not be modelled as a Euclidean motion of space, but rather as a translation and rotation of the frame A (representing an initial pose) to move it to the position and orientation of frame B (representing a final pose) *without moving the whole of space along with the frame*. To make this point, we argue that motion (either a Euclidean motion or a pose change) should be modelled by a group action acting on an appropriate space representing the poses. The group associated with rigid-body or Euclidean motion is the Special Euclidean group $SE(3)$ and it acts on points in Euclidean 3-space. When a frame of reference A is fixed to Euclidean space, then a Euclidean motion of space will carry the frame along with it to a new location and orientation characterised by a second frame B . It is well known that the change in position and orientation from frame A to frame B fully characterizes the Euclidean motion of space, however, it is less well known that its expression in terms of a homogeneous transformation ${}^A H_B$ is dependent on the observer. In particular, we show that when this Euclidean motion is expressed from the point of view of a separate observer O , the resulting element of the matrix group $SE(3)$ is *not* the same element that would be obtained if the observer is located at the origin of frame A , the classical formulation of Euclidean motion in robotics.

We go on to consider the action of a different group, the *pose change group*, on the space of poses (represented by frames). The pose change group, $PCG(3)$, is the direct product of the Special Orthogonal group $SO(3)$ and the additive translation group \mathbb{R}^3 . To emphasize the difference to the Special Euclidean group we initially use pairs (R, \mathbf{t}) of rotations R and translations \mathbf{t} to describe both groups so that the difference in the group laws becomes immediately apparent. We illustrate how the direct-product group structure articulated here results in geodesics on pose space that can be more natural in some trajectory-generation applications. We believe that this observation has significant implications in modelling, path planning and control for pose change when observed from a position that is not the pose itself.

Perhaps the closest work to ours in the recent literature is that in [1], which introduces the *cross-motion-invariant* group, $CMI(3)$. This is a direct product of the unit quaternions (or equivalently $Spin(3)$) and \mathbb{R}^3 . The motivations of that work and of ours are significantly different for two reasons: (i) in [1] the goal is a reformulation of classical *invariant descriptions* of Euclidean motions using $CMI(3)$ in place of $SE(3)$, whereas our goal is not that at all – we introduce a formulation for describing pose changes that *varies with the perspective of an observer*; (ii) In [1], there are no three-index quantities defined or used, whereas in our formulation three-index quantities figure prominently. Moreover, we show that the purpose of the pose change group, $PCG(3)$, is not to describe Euclidean motions. To emphasize this point, we disambiguate four concepts that are often conflated: poses, coordinate transformations, pose changes, and Euclidean motions by explaining what the differences between these concepts are.

The remainder of the paper is structured as follows. First, the traditional view of Euclidean motions as elements of the group $SE(3)$ is reviewed. We then review the mathematics of coordinate changes, which is known in kinematics but is more often used in computer vision. We then review elements of screw theory, focusing on the screw parameters of Euclidean motions that are invariant under coordinate changes (or changes in perspective). Then we take a mathematical view to explain the differences between spaces of poses, pose changes, Euclidean motions, and coordinate transformations, all of which are different mathematical objects that get conflated in the robot kinematics literature. The paper concludes with an application of the new view of pose changes to a trajectory generation problem.

2 The Traditional View

The literature on kinematics is vast and spans multiple centuries. The earliest, and most fundamental, work on kinematics was formulated in a coordinate-free setting both for pure rotations [8, 16, 30] and full Euclidean motions [6, 9]. Such formulations were put forth in an era in which the computational benefits of coordinates had not yet been realized. But this also endows such works with an elegance that is sometimes lacking in recent work. Modern treatments of kinematics can be found in [2, 4, 7, 18, 19, 26, 27, 29, 32]. A mainstay of robot kinematics is screw theory, which is described in detail in works including [5, 12, 13, 24, 31]. The part of this paper that reviews the group-theoretic and screw-theoretic aspects of Euclidean motions follows that in [10].

The group of rigid-body motions, $SE(3)$, consists of pairs (R, \mathbf{t}) where $R \in SO(3)$ is a *rotation*, and $\mathbf{t} \in \mathbb{R}^3$ is a *translation*. The group law is

$$(R_1, \mathbf{t}_1) \circ (R_2, \mathbf{t}_2) = (R_1 R_2, R_1 \mathbf{t}_2 + \mathbf{t}_1). \quad (1)$$

From this law, and the fact that the identity element is $(I, \mathbf{0})$, it follows that the inverse of a rigid-body displacement is

$$(R, \mathbf{t})^{-1} = (R, -R^T \mathbf{t})$$

where T denotes the transpose of a matrix.

Given a point $\mathbf{x} \in \mathbb{R}^3$, an element $(R, \mathbf{t}) \in SE(3)$ acts as

$$(R, \mathbf{t}) \cdot \mathbf{x} = R\mathbf{x} + \mathbf{t}, \quad (2)$$

and this satisfies the definition of a (left) *group action*. That is,

$$((R_1, \mathbf{t}_1) \circ (R_2, \mathbf{t}_2)) \cdot \mathbf{x} = (R_1, \mathbf{t}_1) \cdot ((R_2, \mathbf{t}_2) \cdot \mathbf{x})$$

and

$$(I, \mathbf{0}) \cdot \mathbf{x} = \mathbf{x}.$$

Written slightly more abstractly, if (G, \circ) is a group and X is a set, then (G, \circ) is said to act on X if there is an operation \cdot (called an ‘action’), such that for the group identity $e \in G$ and every pair $g_1, g_2 \in G$ we have

$$e \cdot x = x \quad \text{and} \quad (g_1 \circ g_2) \cdot x = g_1 \cdot (g_2 \cdot x) \in X. \quad (3)$$

Homogeneous transformation matrices of the form

$$H(R, \mathbf{t}) = \begin{pmatrix} R & \mathbf{t} \\ \mathbf{0}^T & 1 \end{pmatrix}. \quad (4)$$

are traditionally used to represent rigid-body displacements [7, 14, 26]. It is easy to see by the rules of matrix multiplication and the composition rule for rigid-body motions that

$$H((R_1, \mathbf{t}_1) \circ (R_2, \mathbf{t}_2)) = H(R_1, \mathbf{t}_1)H(R_2, \mathbf{t}_2).$$

Likewise, the inverse of a homogeneous transformation matrix represents the inverse of a motion:

$$H((R, \mathbf{t})^{-1}) = [H(R, \mathbf{t})]^{-1}.$$

In this notation, vectors in \mathbb{R}^3 are augmented by appending a “1” to form a vector

$$X = \begin{pmatrix} \mathbf{x} \\ 1 \end{pmatrix}, \quad (5)$$

and this preserves the properties of the group action, computed as a matrix vector product.

As a prelude to what follows, consider labeled reference frames and the Euclidean composition of motions

$$H({}_A^A R_B, {}_A^A \mathbf{t}_B) H({}_B^B R_C, {}_B^B \mathbf{t}_C) = H({}_A^A R_B {}_B^B R_C, {}_A^A R_B {}_B^B \mathbf{t}_C + {}_A^A \mathbf{t}_B) \quad (6)$$

where the superscript denotes the frame in which motions are described, and the subscripts denote the location of frames before and after the motion is applied. The result of the above equation is then $H({}_A^A R_C, {}_A^A \mathbf{t}_C)$. But since ${}_A^A R_B {}_B^B R_C = {}_A^A R_C$, it follows that for translations it is possible to write

$${}_A^A \mathbf{t}_C = {}_A^A \mathbf{t}_B + {}_B^B \mathbf{t}_C.$$

This elementary and well-known statement will be of use later when everything is observed from a different frame, O .

3 Difference Between Pose, Coordinate Transforms, Pose Changes, and Euclidean Motions

A *Euclidean motion* is a handedness-preserving isometry of Euclidean space. Such motions can be described using the group-theoretic tools in the previous section. Under the action of a Euclidean motion, all points in Euclidean space move as a single rigid-body. A Euclidean motion that takes frame A to frame B is a well-defined object even without introducing any coordinates or a frame of reference in which to observe the motion.

A *pose* is different than a Euclidean motion in that it describes a position and orientation (or frame) in space. Simply put, if a (right-handed) frame is marked on Euclidean space, the result is a pose. Such a pose (or a set of poses) can exist as a geometric construction without coordinates.

A *change of pose* is a conversion of one pose into another. For example, given a moving finite rigid body with a body-fixed reference frame, the reference frame is initially at one pose at the initial time and then it is at another pose at a subsequent time. We emphasize that this is different than a Euclidean motion where a copy of the whole of Euclidean space attached to the body moves with it and maps back into itself as the body undergoes the motion.

Once a global reference frame is established, then both poses and Euclidean motions can be described using homogeneous matrices. Such matrices can also play a different role as *coordinate transformations* to describe the motion from different perspectives. That is, whereas the phenomena of Euclidean motions and pose changes are well defined regardless of how they are observed, when seeking to express such phenomena numerically, coordinate frames must be drawn both in the object that moves and in a fixed copy of Euclidean space. Coordinate transformations then describe two distinctly different changes in perspective: (1) changes in the space-fixed reference frame in which motions and poses are described; (2) changes in the way reference frames are attached to moving bodies.

The following section describes in precise mathematical terms how coordinate changes affect the homogeneous transformations describing Euclidean motions.

4 Conjugation and Change of View

The group-theoretic treatment reviewed in the previous sections uses “light” notation that suppresses information about which frames the displacements are viewed from. For example, the Cartesian coordinates of the position of a point in $\mathbf{x} \in \mathbb{R}^n$ depend on which frame the point is viewed from.

To make this point clear we now introduce four frames of reference: O , A , B , and C , and use “heavy” notation. Then ${}^O \mathbf{x}$, ${}^A \mathbf{x}$, ${}^B \mathbf{x}$, ${}^C \mathbf{x}$, are the coordinates of \mathbf{x} as seen in O , A , B , and C , respectively.¹ This much is common knowledge in the fields of Robotics, Mechanisms, and Computer Vision. What is less commonly known is that a *three-indexed* rigid-body motion of the form [34]

$${}^O H_B = H({}_A^O R_B, {}_A^O \mathbf{d}_B) \quad (7)$$

¹In linear algebra terms, this means that we select the origin of the respective frame as the zero point in our coordinates and the axes of the frame as a basis of the vector space describing linear translations of the origin.

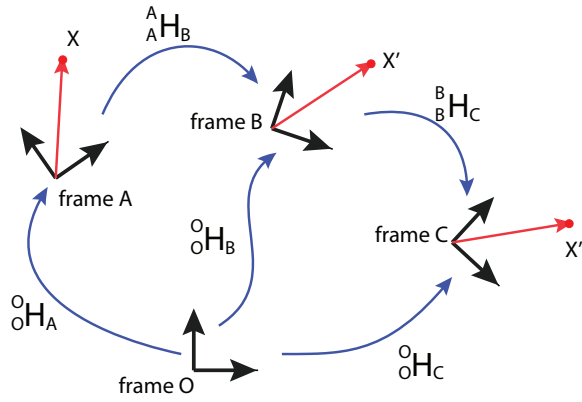


Fig. 2: Relationship between the frames O , A , B and C

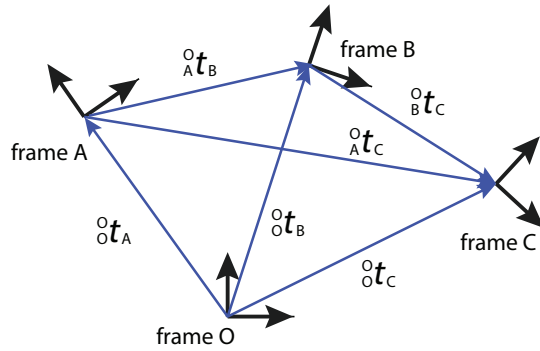


Fig. 3: Translation Vectors $^O t_A, ^O t_B, ^O t_C, ^A t_B, ^B t_C$

is required to avoid ambiguity when considering the rigid-body displacement from A to B as seen in O . Usually in robotics and mechanism kinematics $^A H_B$ is considered, which allows for simpler notation such as $^A H_B$. But to make the fundamental points in this paper, we keep all three indices. Fig. 2 illustrates the various reference frames used throughout this paper.

Within the three frame context, traditional statements about the concatenation of reference frames such as

$$^A H_B {}^B H_C = {}^A H_C$$

are instead written as

$$^A H_{BB} {}^B H_C = {}^A H_C. \quad (8)$$

Moreover, from Fig. 3 it is clear that translations viewed from the same reference frame can all be related by traditional vector arithmetic. For example,

$$^O t_B = ^O t_C - ^O t_A, \quad ^B t_C = ^O t_C - ^O t_B$$

and

$$^A t_C = ^A t_B + ^B t_C = ^O t_C - ^O t_A. \quad (9)$$

This much is clear simply from classical vector arithmetic.

Another way to understand this is to simply observe that when performing the multiplication in (8), the resulting translation is

$$^A t_C = ^A t_B + {}^A R_{BB} {}^B t_C = ^A t_B + ^B t_C,$$

which in turn can be converted to the first equality in (9) by pre-multiplication by ${}^O R_A$.

We have used the notation ${}^O \mathbf{d}_B$ in Equation (7) to emphasize the fact that this vector is not the translation vector from the origin of frame A to the origin of frame B but rather the vector describing the displacement of the origin of frame O under the action of the Euclidean motion of space that is represented by ${}^O H_B$.

We now examine the relationship between ${}^O H_B$, ${}^A H_B$, and ${}^O H_A$. Let \mathbf{x} be a specific point in Euclidean space and let X be its description in homogeneous coordinates as in (5). The coordinates of this can be described in any reference frame. For example, if ${}^A X$ is the homogeneous description of \mathbf{x} as seen in frame A , then

$${}^O X = {}^O \mathcal{H}_A {}^A X.$$

We have used the calligraphic notation ${}^O \mathcal{H}_A$ to emphasize that in this context we are not considering a *Euclidean motion* ${}^O H_A$ of space, indeed we are talking about a single fixed point in space \mathbf{x} , but a *coordinate transformation* of how this point is represented by the entries of the vector X .

Alternatively, if this point is moved to a new point \mathbf{x}' by the same Euclidean motion that moves frame A to frame B , then

$${}^A X' = {}^A H_B {}^A X. \quad (10)$$

This motion of the point \mathbf{x} to the new point \mathbf{x}' should not be confused with the coordinate change

$${}^A X' = {}^A \mathcal{H}_B {}^B X'. \quad (11)$$

The relationship that links these two equations is the fact that the coordinates of the points \mathbf{x} and \mathbf{x}' are the same when viewed in the correct reference frames, that is,

$${}^B X' = {}^A X,$$

and that the matrix equation

$${}^A \mathcal{H}_B = {}^A H_B \quad (12)$$

holds, i.e. both objects have the same numerical representation in the matrix group $SE(3)$ although they have very different conceptual meanings. Indeed, this is where (8) comes from.

Expressions analogous to those above which involve the frame O include

$${}^O X' = {}^O H_B {}^O X, \quad {}^O X = {}^O \mathcal{H}_A {}^A X = {}^O H_A {}^A X.$$

Combining the above equations and localizing using the fact that \mathbf{x} is an arbitrary point yields

$$\boxed{{}^O H_B = {}^O \mathcal{H}_A {}^A H_B {}^O \mathcal{H}_A^{-1} = {}^O H_A {}^A H_B {}^O H_A^{-1}}. \quad (13)$$

Such conjugation/similarity transformations are well-known in kinematics [7, 22, 26, 33]. The three index notation used here is inspired by [34]. In the present context, ${}^A H_B$ describes a Euclidean motion, whereas ${}^O \mathcal{H}_A$ is a coordinate transformation whose matrix representation is the same as that of the Euclidean motion ${}^O H_A$. The result of the conjugation in (13) is again a Euclidean motion, but now seen with respect to a different coordinate system.

Performing the matrix multiplications in (13) gives rotation and translation parts

$${}^O R_B = {}^O R_A {}^A R_B {}^O R_A^{-1}$$

and

$$\boxed{{}^O \mathbf{d}_B = (I - {}^O R_B) {}^O \mathbf{t}_A + {}^O \mathbf{t}_B} \quad (14)$$

where

$${}^O_A \mathbf{t}_B = {}^O R_{AA} {}^A \mathbf{t}_B. \quad (15)$$

To clarify further the concept of a three-index translation vector, let \mathbf{x} denote a point in space, which can be thought of as the origin of a reference frame X . Then, for example, the translation ${}^O_A \mathbf{t}_X$ is actually the position of \mathbf{x} relative to the origin of A , but as seen from the orientation of O .

Note from (14) that

$$\boxed{{}^O_A \mathbf{d}_B \neq {}^O_A \mathbf{t}_B}, \quad (16)$$

To repeat what was stated earlier, ${}^O_A \mathbf{t}_B$ is the translation vector from the origin of frame A to the origin of frame B as seen in O , and ${}^O_A \mathbf{d}_B$ is the vector describing the displacement of the origin of frame O under the action of the Euclidean motion of space that is represented by ${}^O_A H_B$. Therefore, it should be no surprise that these are not equal since they are two completely different things. But given ${}^A H_B$ and ${}^O H_A$, all the necessary information exists to interconvert between ${}^O_A \mathbf{d}_B$ and ${}^O_A \mathbf{t}_B = {}^O R_{AA} {}^A \mathbf{t}_B$.

It can also be shown that homogeneous transforms describing concatenated displacements $A \rightarrow B \rightarrow C$ all observed from frame O can be written as²

$${}^O H_C = {}^O H_C {}^O H_B. \quad (17)$$

Explicitly,

$${}^O H_C {}^O H_B = ({}^O H_B {}^B H_C {}^O H_B^{-1}) ({}^O H_A {}^A H_B {}^O H_A^{-1}).$$

The parentheses are only for emphasis and can be removed. Then using the fact that

$${}^O H_B^{-1} {}^O H_A = {}^A H_B^{-1}$$

allows for the simplification

$${}^O H_C {}^O H_B = {}^O H_B {}^B H_C {}^O H_A^{-1}.$$

But premultiplying by $I = {}^O H_A {}^O H_A^{-1}$ and using the fact that

$${}^A H_B = {}^O H_A^{-1} {}^O H_B \quad (18)$$

gives

$${}^O H_C {}^O H_B = {}^O H_A {}^A H_B {}^B H_C {}^O H_A^{-1}.$$

This, in combination with (8), gives (17).

As a consequence, the rotational parts of (17) follow as

$${}^O_A R_C = {}^O_B R_C {}^O_A R_B. \quad (19)$$

We note in passing that substituting (18) into (13) gives

$${}^O_A H_B = {}^O H_B {}^O H_A^{-1} \quad (20)$$

²The reader is invited to compare the order of terms in Equations (8) and (17). The latter is the usual linear algebra expression where matrix multiplication represents concatenation of affine maps given that all matrix representations are chosen with respect to the same basis. The former has no linear algebra equivalent and is specific to rigid body kinematics.

These concepts are now demonstrated with concrete numerical examples in the planar case.

In Fig. 4, five planar reference frames are shown. Each can be described relative to the world frame, W , as an (R, \mathbf{t}) pair of the form

$$(R, \mathbf{t}) = \begin{pmatrix} \cos \theta & -\sin \theta & t_1 \\ \sin \theta & \cos \theta & t_2 \end{pmatrix},$$

and the corresponding homogeneous transformation $H(R, \mathbf{t}) \in SE(2)$ is the 3×3 matrix padded by a third row of the form $[0, 0, 1]$. Explicitly,

$$({}^W R_W, {}^W \mathbf{t}_W) = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{pmatrix};$$

$$({}^W R_A, {}^W \mathbf{t}_A) = \begin{pmatrix} 1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2} \\ -1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2} \end{pmatrix};$$

$$({}^W R_B, {}^W \mathbf{t}_B) = \begin{pmatrix} 0 & 1 & 1 \\ -1 & 0 & 0 \end{pmatrix};$$

$$({}^W R_C, {}^W \mathbf{t}_C) = \begin{pmatrix} -1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2} \\ -1/\sqrt{2} & -1/\sqrt{2} & -1/\sqrt{2} \end{pmatrix};$$

$$({}^W R_O, {}^W \mathbf{t}_O) = \begin{pmatrix} -1 & 0 & 0 \\ 0 & -1 & -1 \end{pmatrix}.$$

The goal then becomes describing ${}^A H_B$, ${}^B H_C$, and ${}^A H_C$, when $*$ = W or O . Using usual $SE(2)$ calculations, we can find from the above

$${}^A H_B = {}^W H_A^{-1} {}^W H_B \text{ and } {}^B H_C = {}^W H_B^{-1} {}^W H_C$$

and from this

$${}^A H_C = {}^W H_A^{-1} {}^W H_C = {}^A H_B {}^B H_C$$

as usual. Moreover,

$${}^O H_A = {}^W H_O^{-1} {}^W H_A.$$

Three-index transforms from the perspective of W are obtained as

$${}^W H_B = {}^W H_A {}^A H_B {}^W H_A^{-1} = {}^W H_B {}^W H_A^{-1} \quad (21)$$

and similarly,

$${}^W H_C = {}^W H_C {}^W H_B^{-1} \text{ and } {}^W H_C = {}^W H_C {}^W H_A^{-1}. \quad (22)$$

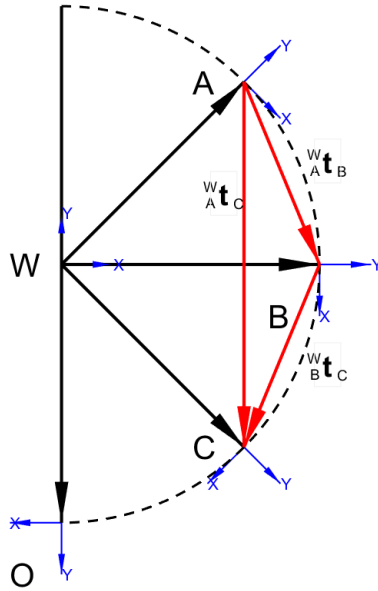


Fig. 4: Demonstration of the Difference Between ${}^W_A \mathbf{d}_B$ and ${}^W_A \mathbf{t}_B$, ${}^W_B \mathbf{d}_C$ and ${}^W_B \mathbf{t}_C$, ${}^W_A \mathbf{d}_C$ and ${}^W_A \mathbf{t}_C$ (Note that ${}^W_A \mathbf{d}_B = {}^W_B \mathbf{d}_C = {}^W_A \mathbf{d}_C = \mathbf{0}$).

Clearly,

$${}^W_A H_C = {}^W_B H_C {}^W_B H_A$$

In this particular example,

$$({}^A R_B, {}^A \mathbf{t}_B) = \begin{pmatrix} 1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2} \\ -1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2}-1 \end{pmatrix};$$

$$({}^B R_C, {}^B \mathbf{t}_C) = \begin{pmatrix} 1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2}-1 \\ -1/\sqrt{2} & 1/\sqrt{2} & 1/\sqrt{2} \end{pmatrix};$$

$$({}^A R_C, {}^A \mathbf{t}_C) = \begin{pmatrix} 0 & 1 & 1 \\ -1 & 0 & -1 \end{pmatrix};$$

$$({}^O R_A, {}^O \mathbf{t}_A) = \begin{pmatrix} -1/\sqrt{2} & -1/\sqrt{2} & -1/\sqrt{2} \\ 1/\sqrt{2} & -1/\sqrt{2} & -1/\sqrt{2}-1 \end{pmatrix};$$

The motions implied by these homogeneous transformations (which are equivalent to pose changes because the left-hand subscripts and superscripts match) are displayed with curved arrows in Fig. 4.

Direct evaluation of (21) and (22) gives

$$({}^W_A R_B, {}^W_A \mathbf{d}_B) = \begin{pmatrix} 1/\sqrt{2} & 1/\sqrt{2} & 0 \\ -1/\sqrt{2} & 1/\sqrt{2} & 0 \end{pmatrix};$$

$$({}^W R_C, {}^W \mathbf{d}_C) = \begin{pmatrix} 1/\sqrt{2} & 1/\sqrt{2} & 0 \\ -1/\sqrt{2} & 1/\sqrt{2} & 0 \end{pmatrix};$$

$$({}^W R_C, {}^W \mathbf{d}_C) = \begin{pmatrix} 0 & 1 & 0 \\ -1 & 0 & 0 \end{pmatrix};$$

From these, the translations ${}^W \mathbf{d}_B$, ${}^W \mathbf{d}_C$, and ${}^W \mathbf{d}_C$, which are all zero, can be extracted directly. This should be no surprise because the Euclidean motion that moves the whole plane transforming A into B has a pole at the origin of W . The same is true for the motion that moves B to C and A to C .

In contrast, the translations

$${}^W \mathbf{t}_B = \begin{pmatrix} 1 - 1/\sqrt{2} \\ -1/\sqrt{2} \end{pmatrix}$$

$${}^W \mathbf{t}_C = \begin{pmatrix} 1/\sqrt{2} - 1 \\ -1/\sqrt{2} \end{pmatrix}$$

$${}^W \mathbf{t}_C = \begin{pmatrix} 0 \\ -\sqrt{2} \end{pmatrix}$$

are simply the vectors describing the relative positions of origins of the frames expressed in the orientation of W .

It is not difficult to compute the homogenous transformations

$${}^O H_B = {}^O H_A {}^A H_B {}^O H_A^{-1}$$

and similarly for ${}^O H_C$ and ${}^O H_C$. From these the translation parts of these homogeneous transformation, ${}^O \mathbf{d}_B$, ${}^O \mathbf{d}_C$, and ${}^O \mathbf{d}_C$, can be extracted. and it can be verified that (13) holds. Explicitly,

$${}^O \mathbf{d}_B = \begin{pmatrix} 1/\sqrt{2} \\ 1/\sqrt{2} - 1 \end{pmatrix};$$

$${}^O \mathbf{d}_C = \begin{pmatrix} 1/\sqrt{2} \\ 1/\sqrt{2} - 1 \end{pmatrix};$$

$${}^O \mathbf{d}_C = \begin{pmatrix} 1 \\ -1 \end{pmatrix}$$

and these vectors are displayed on Fig. 5 together with the vectors

$${}^O \mathbf{t}_B = \begin{pmatrix} 1/\sqrt{2} - 1 \\ 1/\sqrt{2} \end{pmatrix};$$

$${}^O \mathbf{t}_C = \begin{pmatrix} 1 - 1/\sqrt{2} \\ 1/\sqrt{2} \end{pmatrix};$$

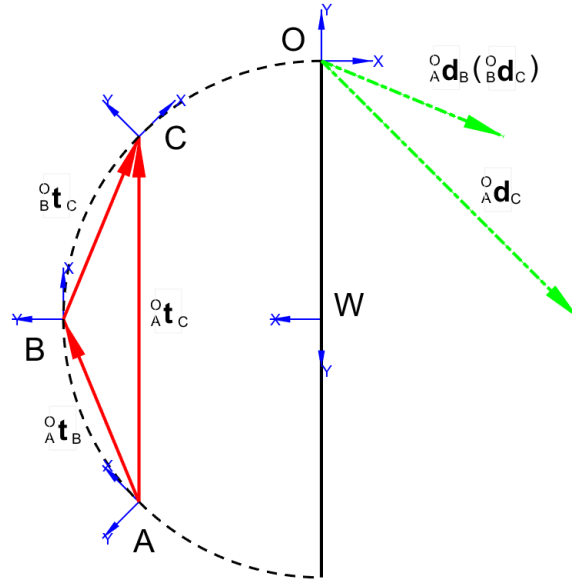


Fig. 5: Demonstration of ${}^O_A \mathbf{d}_B$, ${}^O_B \mathbf{d}_C$, ${}^O_A \mathbf{d}_C$ and ${}^O_A \mathbf{t}_B$, ${}^O_B \mathbf{t}_C$, ${}^O_A \mathbf{t}_C$.

$${}^O_A \mathbf{t}_C = \begin{pmatrix} 0 \\ \sqrt{2} \end{pmatrix}.$$

This figure is Fig. 4 rotated 180 degrees around the origin of the world frame W to make it easier to visually inspect that the coordinates in the above vectors (as described in O) are plausible.

Clearly the ${}^O_A \mathbf{d}_B$ is not the translation from A to B as described from the perspective of O , but ${}^O_A \mathbf{t}_B$ is. And similarly for the other transformations. What this means is that using the mathematical apparatus designed to describe Euclidean motions is not the appropriate one for describing pose changes in the special case when the left sub- and super-scripts do not match. This is what motivates the development of the formulation in this paper. Clearly, the translations expressed in terms of numerical components above simply add as ${}^O_A \mathbf{t}_B + {}^O_B \mathbf{t}_C = {}^O_A \mathbf{t}_C$ and they each point from the correct starting point to the correct final one.

5 Screw Parameters

According to Chasles' Theorem for finite displacements [9]: (1) Every motion of a rigid body can be considered as a translation in space and a rotation about a point; (2) Every spatial displacement of a rigid body can be equivalently affected by a single rotation about an axis and translation along the same axis.

This forms the foundation for Screw Theory, as developed in [5, 13, 15].

In screw theory, the axis in space is described by a line

$$\mathbf{L}(t) = \mathbf{p} + t\mathbf{n}, \quad \forall t \in \mathbb{R},$$

where \mathbf{n} is the unit vector pointing along the line and \mathbf{p} is the unique vector pointing to the screw axis and intersecting it at a right angle. Therefore, $\mathbf{p} \cdot \mathbf{n} = 0$.

Any Euclidean motion viewed as a screw displacement can be expressed in terms of (\mathbf{n}, \mathbf{p}) and the motion parameters (θ, d) , i.e., the angle of rotation and the distance travelled around/along \mathbf{n} , is given as

$$H(\mathbf{n}, \mathbf{p}, \theta, d) = \begin{pmatrix} e^{\theta \hat{\mathbf{n}}} & (\mathbb{I} - e^{\theta \hat{\mathbf{n}}})\mathbf{p} + d\mathbf{n} \\ \mathbf{0}^T & 1 \end{pmatrix} \quad (23)$$

where

$$\hat{\mathbf{n}} = \begin{pmatrix} 0 & -n_3 & n_2 \\ n_3 & 0 & -n_1 \\ -n_2 & n_1 & 0 \end{pmatrix} \quad (24)$$

is the skew-symmetric matrix wherein n_1 , n_2 , and n_3 are the components of \mathbf{n} .

The screw axis parameters (\mathbf{n}, \mathbf{p}) and motion parameters (θ, d) can be extracted from a given rigid displacement (R, \mathbf{d}) . Since this is widely known for pure rotations, half the problem is already solved, i.e., \mathbf{n} and θ are calculated from $R = e^{\theta \hat{\mathbf{n}}}$ by using Euler's axis-angle expression

$$e^{\theta \hat{\mathbf{n}}} = I + \sin \theta \hat{\mathbf{n}} + (1 - \cos \theta) \hat{\mathbf{n}}^2 \quad (25)$$

and observing that

$$\text{tr}(R) = 1 + 2 \cos \theta \quad \text{and} \quad R - R^T = 2 \sin \theta \hat{\mathbf{n}}, \quad (26)$$

which can be solved for θ and $\hat{\mathbf{n}}$, the skew-symmetric matrix associated with \mathbf{n} . Since

$$(\mathbb{I} - R)\mathbf{p} + d\mathbf{n} = \mathbf{d} \quad \text{and} \quad \mathbf{p} \cdot \mathbf{n} = 0,$$

it follows from $\mathbf{n} \cdot e^{\theta \hat{\mathbf{n}}}\mathbf{p} = \mathbf{n} \cdot \mathbf{p} = 0$ that

$$d = \mathbf{d} \cdot \mathbf{n}. \quad (27)$$

It is known that θ and d are invariant under conjugation by arbitrary motions [10] and so the screw parameters $({}_A\theta_B, {}_A d_B)$ depend only on the two frames A and B . Interestingly, from (14) and (27) we have

$$\boxed{{}_A d_B = {}_A \mathbf{d}_B \cdot {}_A \mathbf{n}_B = {}_A \mathbf{t}_B \cdot {}_A \mathbf{n}_B.} \quad (28)$$

Therefore, the screw parameters $({}_A\theta_B, {}_A d_B)$ that are invariant to the choice of O can be obtained either from ${}_A^O H_B = H({}_A^O R_B, {}_A^O \mathbf{d}_B)$ or from $({}_A^O R_B, {}_A^O \mathbf{t}_B)$.

6 Describing Pose Changes as Direct Product Operations

An altogether different way to describe changes in pose is formulated in this section. Suppose we are sitting at a space-fixed frame O and we are watching frame A move to frame B . We will see the origin of A move to the origin of B . This gives the vector ${}_A^O \mathbf{t}_B$. Again, this is not the same as ${}_A^O \mathbf{d}_B$. Similarly, the rotational part of the displacement as seen from this reference frame will be of the form

$${}_A^O R_B = \exp({}_A \theta_B {}_A^O \hat{\mathbf{n}}_B), \quad (29)$$

which is evaluated using (25).

Here ${}_A \theta_B$ does not depend on O because it is one of the conjugation-invariant quantities for $SE(3)$ as discussed in Section 5. But the vector ${}_A^O \mathbf{n}_B$ obviously does depend on the coordinate system from which it is viewed.

Since ${}_A^O \mathbf{n}_B = {}_O^A R_A \mathbf{n}_B$, we can use the well-known fact that for any vector $\mathbf{s} \in \mathbb{R}^3$ and any rotation matrix $Q \in SO(3)$, the skew-symmetric matrix associated with $Q\mathbf{s}$ can be expressed as

$$\widehat{Q\mathbf{s}} = Q\hat{\mathbf{s}}Q^T.$$

Combining this with the general property of the matrix exponential that

$$\exp(PSP^{-1}) = P \exp(S) P^{-1}$$

(for any $S, P \in \mathbb{R}^{n \times n}$ with P invertible) gives in the present case of $n = 3$ and $Q^{-1} = Q^T$ that

$${}^O R_B = {}^O R_A {}^A R_B {}^O R_A^T,$$

where $Q = {}^O R_A$ and $S = {}_A \theta_B {}_A \hat{\mathbf{n}}_B$. This formula for ${}^O R_B$ is just the rotational part of (13).

Given two rotation-translation pairs $({}^O R_B, {}^O \mathbf{t}_B)$ and $({}^O R_C, {}^O \mathbf{t}_C)$ (where the actual translations ${}^O \mathbf{t}_B$ and ${}^O \mathbf{t}_C$ are used instead of ${}^O \mathbf{d}_B$ and ${}^O \mathbf{d}_C$), a simple rule for moving from A to C follows by combining (19) and (9). That is, the combination of

$${}^O R_C = {}^O R_C {}^O R_B$$

and

$${}^O \mathbf{t}_C = {}^O \mathbf{t}_C + {}^O \mathbf{t}_B$$

defines a *direct product* of the rotation and translation groups

$$({}^O R_C, {}^O \mathbf{t}_C) = ({}^O R_C, {}^O \mathbf{t}_C) \bullet ({}^O R_B, {}^O \mathbf{t}_B) \quad (30)$$

This direct product defines the *pose change group*:

$$\text{PCG}(3) = \text{SO}(3) \times \mathbb{R}^3. \quad (31)$$

6.1 Change of Observer Frame

An action of the pose change group $\text{PCG}(3)$ on pose space can be defined as

$$(Q, \xi) \odot (R, \mathbf{t}) \doteq (QRQ^T, Q\mathbf{t}), \quad (32)$$

where $(Q, \xi) \in \text{PCG}(3)$. Note that the right hand side of (32) does not depend on $\xi \in \mathbb{R}^3$. In other words, the \mathbb{R}^3 part of $\text{PCG}(3) = \text{SO}(3) \times \mathbb{R}^3$ acts trivially. The action \odot is associated with a change of observer frame as follows.

If the motion from A to B is viewed from frame 1 rather than frame O , the resulting homogeneous transformation is

$${}^1 H_B = {}^O H_1^{-1} {}^O H_B {}^O H_1. \quad (33)$$

Obviously, as a consequence

$${}^1 R_B = {}^O R_1^T {}^O R_B {}^O R_1, \quad (34)$$

which is also the rotational part of the pose change parameters resulting by changing the observer from O to 1. Fig. 6 shows how this change in the observer frame affects the observed motion.

A natural question to ask is how the translational part of the pose change parameters are affected by changing the observer from O to 1. One way to calculate this would be to first convert ${}^O \mathbf{t}_B$ to ${}^O \mathbf{d}_B$ and use similarity transformation. Then (33) could be calculated and then the resulting ${}^1 \mathbf{d}_B$ could be converted ${}^1 \mathbf{t}_B$.

Rather than doing this, we can calculate a clean expression for ${}^1 \mathbf{t}_B$ directly, cf. Fig. 7. Since

$${}^1 \mathbf{t}_B = {}^1 R_A {}^A \mathbf{t}_B \quad \text{and} \quad {}^O \mathbf{t}_B = {}^O R_A {}^A \mathbf{t}_B$$

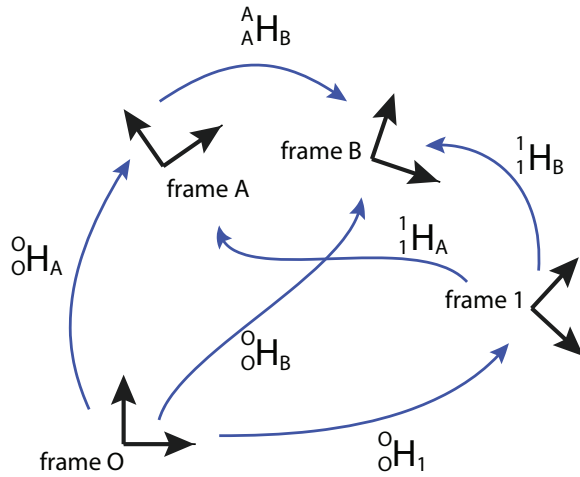


Fig. 6: Transformation of the Observer Frame from O to 1

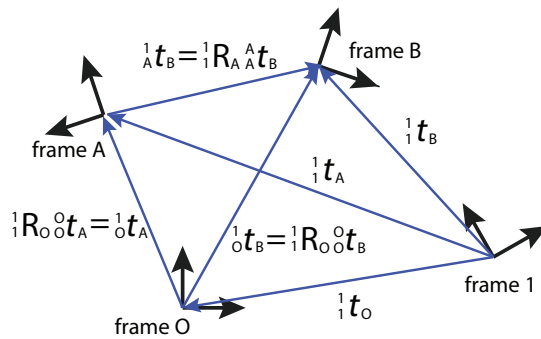


Fig. 7: Coordinates of All Vectors Computed in Frame 1 Instead of Frame O

we have

$${}^1R_A^T {}^1t_B = {}^A t_B = {}^O R_A^T {}^O t_B.$$

Therefore,

$${}^1t_B = {}^1R_A {}^O R_A^T {}^O t_B.$$

This can be written as

$${}^1t_B = {}^1R_O {}^O t_B. \quad (35)$$

Combining (34) and (35) and using (32) gives

$$\boxed{({}^1R_B, {}^1t_B) = ({}^1R_O, \mathbf{0}) \odot ({}^O R_B, {}^O t_B)}. \quad (36)$$

6.2 Change of Body-fixed Frame

In this subsection, we think of pose change as modeling the motion of a frame that is attached to a rigid body. This means that we interpret frame A as where that body-fixed frame is before motion of the body and frame B as where it goes to after motion. We now ask the question what happens when we change the body-fixed frame representing the rigid body

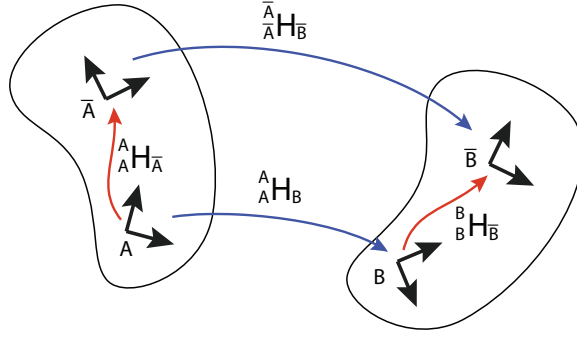


Fig. 8: Conjugation Resulting from Changing Body-Fixed Frames.

from A to \bar{A} before motion and from B to \bar{B} after motion. Since the relative pose of \bar{A} to A as seen in A is the same as the pose of \bar{B} relative to B as seen in B , we can say

$${}^A H_{\bar{A}} = {}^B H_{\bar{B}} \doteq \Delta$$

and

$$\bar{A} H_{\bar{B}} = \Delta^{-1} {}^A H_B \Delta \quad (37)$$

as is clear from Fig. 8. Then, in analogy with the way ${}^O H_B$ was defined earlier,

$${}^O H_{\bar{B}} = {}^O H_{\bar{A}} \bar{A} H_{\bar{B}} {}^O H_A^{-1}.$$

Then, manipulating the expressions for ${}^O H_B$ and ${}^O H_{\bar{B}}$, and letting R_0 be implicitly defined by

$$H(R_0, \mathbf{d}_0) = {}^O H_{\bar{A}} \Delta^{-1} {}^O H_A^{-1} = {}^O H_{\bar{A}} ({}^O H_A \Delta)^{-1}.$$

Notice that ${}^O H_A \Delta = {}^O H_{\bar{A}} {}^A H_{\bar{A}} = {}^O H_{\bar{A}}$, then, $H(R_0, \mathbf{d}_0) = {}^O H_{\bar{A}} {}^O H_A^{-1} = \mathbb{I}$, which also gives $R_0 = \mathbb{I}$.

Then, using the direct-product calculus, the rotational parts follow in the same way as above, and Fig. 9 shows how the translational part of the pose changes behave. Putting these parts together gives the direct-product rule

$$\boxed{\left({}^O R_{\bar{B}, \bar{A}} {}^O \mathbf{t}_{\bar{B}} \right) = \left(\mathbb{I}, {}^O \mathbf{t}_{\bar{B}} \right) \bullet \left({}^O R_{B, A} {}^O \mathbf{t}_B \right) \bullet \left(\mathbb{I}, {}^O \mathbf{t}_A \right)^{-1}}, \quad (38)$$

which is not a conjugation as in $SE(3)$, but is equally convenient.

Remark 6.1. Two distinct actions of $PCG(3)$ on Euclidean space can be defined:

$$\begin{aligned} (R, \mathbf{t}) \odot_1 \mathbf{x} &\doteq \mathbf{t} + \mathbf{x}, \\ (R, \mathbf{t}) \odot_2 \mathbf{x} &\doteq R\mathbf{x}. \end{aligned} \quad (39)$$

Both \odot_1 and \odot_2 satisfy the definition of an action in (3). Note that $\left({}^O R_{B, A} {}^O \mathbf{t}_B \right) \odot_2 {}^O \mathbf{t}_X = {}^O \mathbf{t}_{X'}$. It then follows that

$$\left({}^O R_{B, A} {}^O \mathbf{t}_B \right) \odot_1 \left(\left({}^O R_{B, A} {}^O \mathbf{t}_B \right) \odot_2 {}^O \mathbf{t}_X \right) = {}^O \mathbf{t}_{X'}.$$

The effect of the above is the same as the $SE(3)$ action describing Euclidean motion in (2), although this construction is artificial in the context of pose changes modeled by $PCG(3)$ acting on pose space.

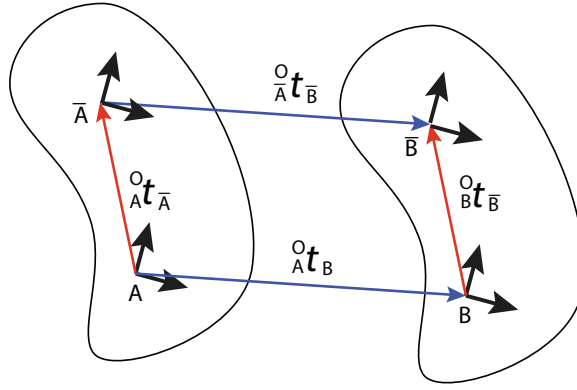


Fig. 9: ${}^O_A \mathbf{t}_A + {}^O_A \mathbf{t}_B = {}^O_A \mathbf{t}_B + {}^O_B \mathbf{t}_{\bar{B}}$.

7 Applications

As motivated in the introduction, an observer at frame O will observe the pose change from A to B in terms of the parameters $({}^O_A R_B, {}^O_A \mathbf{t}_B)$ rather than the Euclidean displacement parameters ${}^O_A H_B = H({}^O_A R_B, {}^O_A \mathbf{d}_B)$. This is the main reason for our exploration of this approach. A consequence is the direct-product structure and associated actions and transformation rules discussed in the previous section. Below we show that this endows $PCG(3)$ with a bi-invariant metric.

7.1 Bi-invariant Metrics

It has been well-known for quite some time that $SE(3)$ does not have nontrivial bi-invariant distance/metric functions, [17, 20, 25, 28]. Yet measuring distance between poses remains important both in kinematics [21, 23] and in motion planning [3]. Therefore, either left-invariant or right-invariant metrics are chosen. Usually, left-invariance is more meaningful. When making this choice, the lack of bi-invariance means that

$$d_{SE(3)}(H_0 H_1, H_0 H_2) = d_{SE(3)}(H_1, H_2)$$

but

$$\begin{aligned} d_{SE(3)}(H_0 H_1 H_0^{-1}, H_0 H_2 H_0^{-1}) &\neq d_{SE(3)}(H_1, H_2) \\ &\neq d_{SE(3)}(H_1 H_0, H_2 H_0) \end{aligned}$$

for general homogeneous transformations $H_0, H_1, H_2 \in SE(3)$. Though $SE(3)$ metrics can exhibit bi-invariance for special pairs of motions [11], it would be nice if bi-invariance could be used as a general feature of metrics. Unfortunately this is not possible.

However, the direct product structure does tolerate bi-invariance. Namely, if

$$d_{\mathbb{R}^3}(\mathbf{x}, \mathbf{y}) = \|\mathbf{x} - \mathbf{y}\|_p$$

is any p -norm, it is invariant under translational shifts. If $d_{SO(3)}(R_1, R_2)$ is any bi-invariant norm for $SO(3)$ (such as the Frobenius norm $\|R_1 - R_2\|_F$ or $\|\log(R_1^T R_2)\|$), then

$$d_{PCG(3)}((R_1, \mathbf{t}_1), (R_2, \mathbf{t}_2)) = d_{\mathbb{R}^3}(\mathbf{x}, \mathbf{y}) + d_{SO(3)}(R_1, R_2)$$

will be bi-invariant under the direct product. That is

$$\begin{aligned} d_{PCG(3)}((R_0, \mathbf{t}_0) \bullet (R_1, \mathbf{t}_1), (R_0, \mathbf{t}_0) \bullet (R_2, \mathbf{t}_2)) &= \\ d_{PCG(3)}((R_1, \mathbf{t}_1), (R_2, \mathbf{t}_2)) &= \\ d_{PCG(3)}((R_1, \mathbf{t}_1) \bullet (R_0, \mathbf{t}_0), (R_2, \mathbf{t}_2) \bullet (R_0, \mathbf{t}_0)). \end{aligned}$$

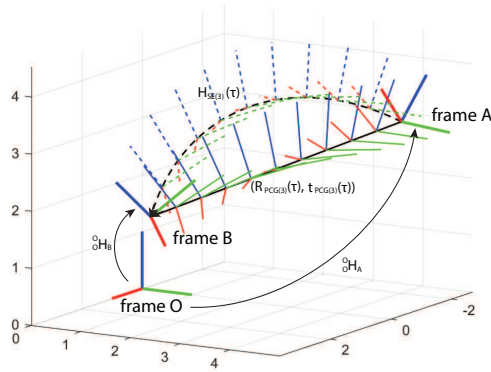


Fig. 10: Comparison of Geodesic Trajectories for $SE(3)$ and $PCG(3)$.

Table 1: Start and end poses of the moving frame (relative to O)

Poses	Rotations		Translations
	Axes	Angles (rad)	
A	[0.1102; 0.9939; 0.0048]	$\frac{\pi}{4}$	[-2; 4; 3]
B	[0.0750; 0.6763; 0.0033]	$-\frac{\pi}{3}$	[3; 2; 2]

We mention the existence of bi-invariant $PCG(3)$ metrics in passing to open up a discussion in the community about its potential efficacy. That said, care must be taken when interpreting this bi-invariance because the actions of $PCG(3)$ are very different than the usual $SE(3)$ action. One application area where metrics have a role in interpolating paths between poses (or motions). The next subsection illustrates how motions observed from O are interpolated.

7.2 Path Generation

Consider the task of an observer designing a trajectory to take frame A to frame B where the design is undertaken in the observer's frame of reference O . Applying the $SE(3)$ machinery and using geodesic interpolation one obtains a trajectory that starts at ${}^O H_A$ at $\tau = 0$ and ends at ${}^O H_B$ at $\tau = 1$ as

$$H(\tau) = \exp(\tau \log({}_A H_B)) {}^O H_A.$$

Here the $SE(3)$ exponential and logarithm are matrix operations. This generates the helical trajectory shown in Fig. 10.

In contrast, for $PCG(3)$, the analogous approach leads to

$$(R(\tau), \mathbf{t}(\tau)) = (\exp(\tau \log({}_A R_B)), {}_A \mathbf{t}_B \tau) \bullet ({}^O R_A, {}^O \mathbf{t}_A),$$

the straight line trajectory shown in Fig. 10.

The configurations of frame A and frame B used in the figure are summarized in Tab. 1.

Both the $SE(3)$ or $PCG(3)$ trajectories may be appropriate in different contexts, however, in many kinematics applications it would seem more natural to use trajectories generated by the pose change group $PCG(3)$ carrying a bi-invariant metric.

7.3 Path Smoothing by Interpolating through Multiple Points

Suppose we have multiple configurations defined on the trajectory of a moving robot, e.g. a quadrotor. By applying the path generation method proposed in the previous subsection, which only uses two points for the interpolation, the resulting path is not smooth. So in this subsection, we deal with the problem of smoothing a path by interpolating through multiple

points, which can be achieved in Euclidean space, $SE(3)$ and $PCG(3)$. This subsection starts to review the interpolation method in Euclidean space through multiple points, and extends to interpolation in $SE(3)$ and $PCG(3)$.

7.3.1 Interpolation in Euclidean Space through Multiple Points

Suppose we have a sequence of n discrete points in m dimensional Euclidean space, ie $\mathbf{x}_k(\tau_k) \in \mathbb{R}^m$, where $k = 1, \dots, n$ and $\tau_k \in \mathbb{R}$. We seek to fit the points by a polynomial with degree $(n-1)$, which passes through the given points. The polynomial can be expressed as $\mathbf{p}(\tau) = \sum_{i=0}^{n-1} \mathbf{a}_i \tau^i$, where $\mathbf{a}_i \in \mathbb{R}^m, i = 0, \dots, n-1$ are vector coefficients of the polynomial, and $\tau \in \mathbb{R}$ is the parameterized time that defines the polynomial.

We then can fit a polynomial to the given points by satisfying the following condition

$$\mathbf{x}_k = \sum_{i=0}^{n-1} \mathbf{a}_i \tau_k^i \quad \forall k \in \{1, \dots, n\}. \quad (40)$$

Stacking in matrix form gives

$$\begin{pmatrix} \tau_1^{n-1} & \tau_1^{n-2} & \dots & \tau_1 & 1 \\ \tau_2^{n-1} & \tau_2^{n-2} & \dots & \tau_2 & 1 \\ \dots & \dots & \dots & \dots & \dots \\ \tau_n^{n-1} & \tau_n^{n-2} & \dots & \tau_n & 1 \end{pmatrix} \begin{pmatrix} \mathbf{a}_{n-1}^T \\ \mathbf{a}_{n-2}^T \\ \dots \\ \mathbf{a}_0^T \end{pmatrix} = \begin{pmatrix} \mathbf{x}_1^T \\ \mathbf{x}_2^T \\ \dots \\ \mathbf{x}_n^T \end{pmatrix}. \quad (41)$$

The matrix storing the time steps on the left hand side is called *Vandermonde matrix*. And solving the system of equations gives the coefficients $\mathbf{a}_k, k = 1, \dots, n$.

7.3.2 Interpolation in $SE(3)$ and $PCG(3)$ through Multiple Points

The idea of interpolation in euclidean space can be extended to $SE(3)$ and $PCG(3)$ as follows. Suppose we are given a sequence of n discrete frames. By the logarithm map, we can convert the frame representations to the Lie Algebra, and for both $SE(3)$ and $PCG(3)$ cases, we can get 6D vectors correspondingly, denoted by $\xi_k \in \mathbb{R}^6$. By using the interpolation in 6D Euclidean space, we can get the coefficients for the polynomial fit $\mathbf{a}_i, i = 0, \dots, (n-1) \in \mathbb{R}^6$. Then, the new sequence of discrete points in $SE(3)$ or $PCG(3)$ can be achieved by exponentiating back from the Lie Algebra. Explicitly,

(a) For $H_k = H(R_k, \mathbf{d}_k) \in SE(3)$, the 6D vector representation in the Lie Algebra can be calculated as

$$\hat{\xi}_k = \log(H_k) = \begin{pmatrix} \log(R_k) & \mathbf{v}_k \\ \mathbf{0}^T & 0 \end{pmatrix} = \begin{pmatrix} \hat{\omega}_k & \mathbf{v} \\ \mathbf{0}^T & 0 \end{pmatrix}, \text{ then } \xi_k = \begin{pmatrix} \omega_k \\ \mathbf{v}_k \end{pmatrix}. \quad (42)$$

We then fit ξ_k in Euclidean space and get


$$\xi(\tau) = \sum_{i=0}^{n-1} \mathbf{a}_i \tau^i = \begin{pmatrix} \omega(\tau) \\ \mathbf{v}(\tau) \end{pmatrix} \text{ s.t. } \xi(\tau_k) = \xi_k. \quad (43)$$

And the exponential mapping is therefore defined as


$$H(\tau) = \exp \begin{pmatrix} \hat{\omega}(\tau) & \mathbf{v}(\tau) \\ \mathbf{0}^T & 0 \end{pmatrix}. \quad (44)$$

(b) For $(R_k, \mathbf{t}_k) \in PCG(3)$, the 6D vector is obtained alternatively as $\xi_k = \begin{pmatrix} \omega_k \\ \mathbf{t}_k \end{pmatrix}$. And similar to $SE(3)$, we fit a polynomial and get $\xi(\tau)$, then exponentiate back as $(e^{\hat{\omega}(\tau)}, \mathbf{t}(\tau))$.

Figure 11 shows the results of interpolating the framed trajectory of a quadrotor by using two adjacent midway points and multiple points on $SE(3)$ and $PCG(3)$. Table 2 summarizes the parameters used in the above example.

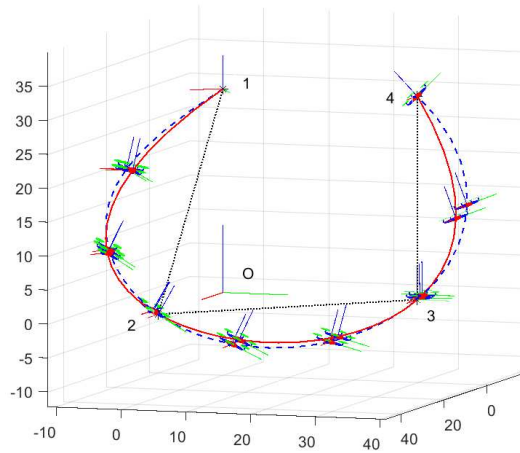

(a) Multiple frames

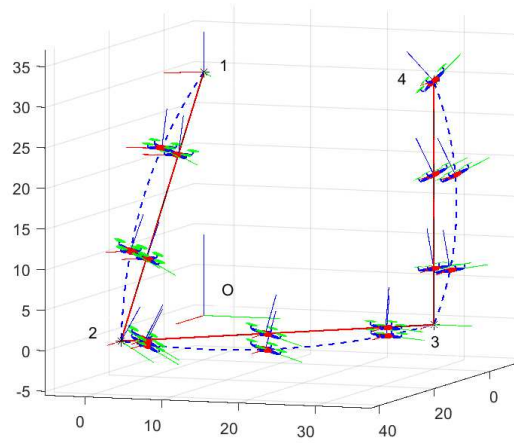

(b) Adjacent frames


Fig. 11: Comparisons of interpolation using multiple frames and two adjacent frames. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses.

Table 2: Pose of each frame (relative to the world frame)

Poses	Rotations		Translations
	Axes	Angles (rad)	
1	[0; 0; 1]	$\frac{\pi}{3}$	[0; 0; 30]
2	[1; 0; 0]	$\frac{\pi}{6}$	[30; 0; 0]
3	[1; 0; 0]	0	[0; 30; 0]
4	[1; 0; 0]	$-\frac{\pi}{4}$	[0; 30; 30]


Remark 7.1. The above mapping works only when the rotational angle difference between any point and the origin is less than π , since the logarithm and exponential mapping on $SO(3)$ breaks at angle π . In order to avoid such situation, we can take the average $\mu = \exp(\frac{1}{n} \sum_{k=1}^n (\log(H_k)))$ ³ of the frames, calculate the shifted relative frames $\{\mu^{-1}H_k\}$, interpolate using multiple shifted frames, and transform back to the global frame. Figure 12 shows the trajectories of interpolation in $SE(3)$ and $PCG(3)$ as well as the mean of the frames.

³The exponential and logarithm maps can be defined on both $SE(3)$ and $PCG(3)$.

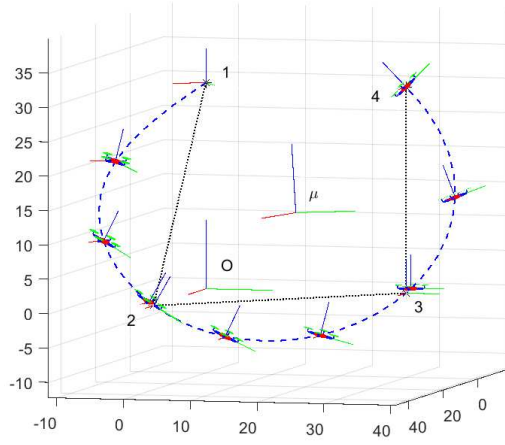

(a) Mean (μ) of frames in $SE(3)$

$$\begin{pmatrix} 0.9659 & 0.2586 & -0.0085 & 7.5 \\ -0.2586 & 0.9638 & -0.0646 & 15 \\ -0.0085 & 0.0646 & 0.9978 & 15 \end{pmatrix}$$

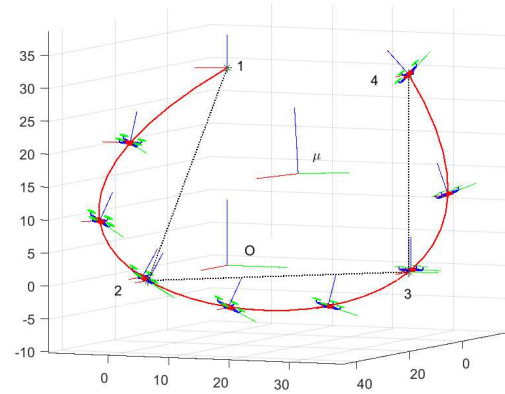

(b) Mean (μ) of frames in $PCG(3)$

$$\begin{pmatrix} 0.9659 & 0.2586 & -0.0085 & 9.6656 \\ -0.2586 & 0.9638 & -0.0646 & 15.9882 \\ -0.0085 & 0.0646 & 0.9978 & 12.2066 \end{pmatrix}$$


Fig. 12: Comparisons of interpolation by shifting according to the mean of frames. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses.

Remark 7.2. The initial time steps used for interpolations can be parameterized evenly or based on the distance of the given points, which will affect the parameters of the polynomial in different ways.


Explicitly, the time step can be defined as evenly distributed over an interval, ie $\tau \in [0, 1]$ and the step $\Delta\tau = \frac{1}{n-1}$. Alternatively, if we define a distance metric between adjacent sample points, ie $L_k = d(\mathbf{x}_k, \mathbf{x}_{k+1})$ ⁴, the time steps can be defined as $\Delta\tau_k = \frac{L_k}{\sum_{k=1}^{n-1} L_k}$, so $\tau_{k+1} = \tau_k + \Delta\tau_k$, where $k = 1, \dots, (n-1)$. This parameterization corresponds the distribution of time steps with the given points, which alleviates the deviation of the interpolated curve. Figure 13 shows the effect on the interpolated curves with different parameterizations of time steps. Table 3 summarizes the configuration of each frame used in the example.

If we choose evenly distributed time steps, the interpolated curve deviates significantly when two points are close to each other (such as Pose 1 and 2, highlighted in Fig. 13), while choosing the distance-related time steps alleviates such effect.

⁴For example, for $\mathbf{x}, \mathbf{y} \in \mathbb{R}^3$, $d_{\mathbb{R}^3}(\mathbf{x}, \mathbf{y}) = \|\mathbf{x} - \mathbf{y}\|_p$; for $X, Y \in SE(3)$, $d_{SE(3)}(X, Y) = \|\log(X^{-1}Y)\|_F$ [11, 28]; for $(R_1, \mathbf{t}_1), (R_2, \mathbf{t}_2) \in PCG(3)$, $d_{PCG(3)}((R_1, \mathbf{t}_1), (R_2, \mathbf{t}_2)) = \|\mathbf{t}_1 - \mathbf{t}_2\|_p + \|\log(R_1^T R_2)\|_F$.

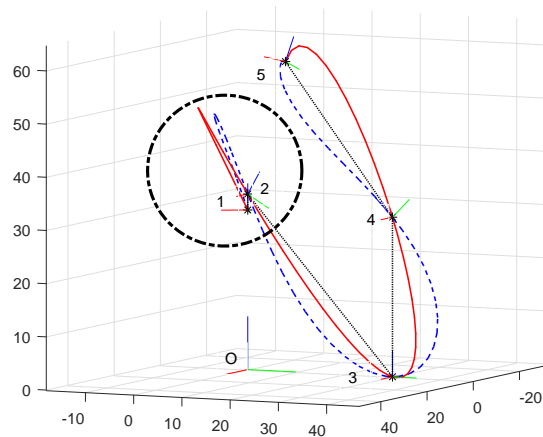

(a) Fitted curves based on evenly distributed time steps

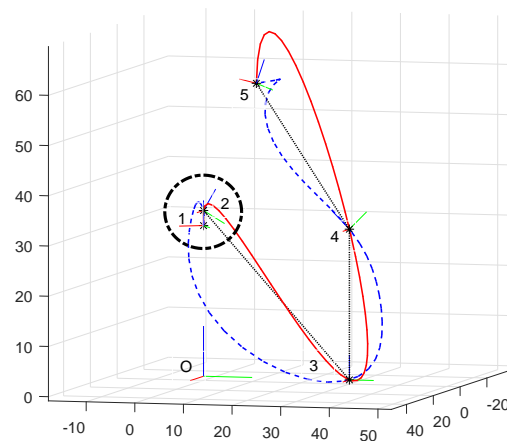

(b) Fitted curves based on distance-related time steps

Fig. 13: Comparisons of interpolation based on different parameterizations of time steps. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses.

8 Conclusions

Whereas in the kinematics of machines and linkages, changes in pose are indistinguishable from Euclidean motions, when viewed from an independent third frame pose changes and Euclidean motions obey different composition and transformation rules. This paper articulates these subtle differences. The calculus of Euclidean motions and how they change with perspective and under coordinate changes is well established. This is reviewed here to compare and contrast with our contribution, which is the development of an analytical framework for the composition of pose changes as a direct product operation, together with direct product actions and rules for changes of perspective changes. Implications for bi-invariant metrics are also explored.

Table 3: Pose of each frame (relative to the world frame)

Poses	Rotations		Translations
	Axes	Angles (rad)	
1	[0; 0; 1]	$\frac{\pi}{3}$	[0; 0; 30]
2	[1; 0; 0]	$\frac{\pi}{6}$	[0; 0; 33]
3	[0.4472; 0.8944; 0]	0	[0; 30; 0]
4	[1; 0; 0]	$-\frac{\pi}{4}$	[0; 30; 30]
5	[0.4286; 0.2857; 0.8571]	$\frac{\pi}{5}$	[15; 15; 60]

Acknowledgements

This work was performed under Office of Naval Research Award N00014-17-1-2142 and National Science Foundation grant IIS-1619050.

References

- [1] Adorno, B. V., Fraisse, P., “The cross-motion invariant group and its application to kinematics.” *IMA Journal of Mathematical Control and Information*, dnw032, 120, published online, 2016.
- [2] Altmann, S.L., *Rotations, Quaternions, and Double Groups*, Dover, 2005.
- [3] Amato, N. M., Bayazit, O. B., Dale, L. K., Jones, C., Vallejo, D., “Choosing Good Distance Metrics and Local Planners for Probabilistic Roadmap Methods,” *Proceedings of the 1998 IEEE International Conference on Robotics and Automation. ICRA’98*, (Vol. 1, pp. 630–637), 1998.
- [4] Angeles, J., *Rational Kinematics*, Springer-Verlag, New York, 1988.
- [5] Ball, R.S., *A Treatise on the Theory of Screws*, Cambridge University press, 1900.
- [6] Blaschke, W. Müller, H.R., *Ebene Kinematik*, Verlag von R. Oldenbourg, München, 1956.
- [7] Bottema, O., Roth, B., *Theoretical Kinematics*, Dover Publications, Inc., New York, 1979.
- [8] Cayley, A., “On the Motion of Rotation of a Solid Body,” *Cambridge Mathematics Journal*, 3:224–232, 1843.
- [9] Chasles, M., “Note sur les propriétés générales du système de deux corps semblables entre eux et placés d’une manière quelconque dans l’espace; et sur le déplacement fini ou infiniment petit d’un corps solide libre.” *Férussac, Bulletin des Sciences Mathématiques*, 14: 321–326, 1830.
- [10] Chirikjian, G.S., Kyatkin, A.B., *Harmonic Analysis for Engineers and Applied Scientists*, Dover, Mineola, NY, 2016.
- [11] Chirikjian, G.S., “Partial Bi-Invariance of $SE(3)$ Metrics,” *Journal of Computing and Information Science in Engineering* 15(1): 011008, 2015.
- [12] Crane, C.D. III, Duffy, J., *Kinematic Analysis of Robot Manipulators by Carl D. Crane III (2008-01-28)1623* Cambridge University Press, 2008.
- [13] Davidson, J.K., Hunt, K.H., *Robots and Screw Theory: Applications of Kinematics and Statics to Robotics*, Oxford University Press, 2004.
- [14] Denavit, J., Hartenberg, R.S., “A Kinematic Notation for Lower-Pair Mechanisms Based on Matrices,” *Journal of Applied Mechanics*, 22: 215–221, June 1955.
- [15] Duffy, J., Hunt, H.E.M., and Lipkin, H., editors. *Proceedings of A Symposium Commemorating the Legacy, Works, and Life of Sir Robert S. Ball*. Cambridge University Press, 2000.
- [16] Euler, L., “Du Mouvement de Rotation des Corps Solides Autour d’un Axe Variable,” *Mémoires de l’Académie des Sciences de Berlin*, 14: 154–193, 1758.
- [17] Fanghella, P., Galletti, C., “Metric Relations and Displacement Groups in Mechanism and Robot Kinematic,” *Journal of Mechanical Design, Transactions of the ASME*, 117(3): 470–478, Sept. 1995.
- [18] Herve, J.M., “The Lie Group of Rigid Body Displacements, A Fundamental Tool for Machine Design,” *Mech. Mach. Theory*, 34, pp. 719–730, 1999.
- [19] Karger, A., Novák, J., *Space Kinematics and Lie Groups*, Gordon and Breach Science Publishers, New York, 1985.
- [20] Kazerounian, K., Rastegar, J., “Object Norms: A Class of Coordinate and Metric Independent Norms for Displacement,” *Flexible Mechanisms, Dynamics, and Analysis*, ASME DE-Vol.47, pp. 271–275, 1992.
- [21] Larochele, P.M., Murray, A.P., Angeles, J., “A Distance Metric for Finite Sets of Rigid-Body Displacements via the Polar Decomposition,” *Journal of Mechanical Design*, 129(8): 883–886, 2007.

- [22] Legnani, G., Casolo, F., Righettini, P., Zappa, B., “A Homogeneous Matrix Approach to 3D Kinematics and Dynamics -? I. Theory. *Mechanism and Machine Theory*, 31(5):573–587, 1996.
- [23] Lin, Q., Burdick, J.W., “Objective and Frame-Invariant Kinematic Metric Functions for Rigid Bodies,” *The International Journal of Robotics Research*, 19(6): 612–625, 2000.
- [24] Lipkin, H., “Geometry and Mappings of Screws with Applications to the Hybrid Control of Robotic Manipulators,” Ph.D. Thesis, University of Florida, 1985.
- [25] Martinez, J.M.R., Duffy, J., “On the Metrics of Rigid Body Displacement for Infinite and Finite Bodies,” *ASME Journal of Mechanical Design*, 117(1): 41–47, March 1995.
- [26] McCarthy, J.M., *Introduction to Theoretical Kinematics*, MIT Press, 1990. (revised and available as an iBook as of 2013.)
- [27] Murray, R.M., Li, Z., and Sastry, S.S., *A Mathematical Introduction to Robotic Manipulation*. New York, USA: CRC Press, 1994.
- [28] Park, F.C., “Distance Metrics on the Rigid-Body Motions with Applications to Mechanism Design,” *Journal of Mechanical Design, Transactions of the ASME*, 117(1): 48–54, March 1995.
- [29] Ravani, B., Roth, B., “Motion Synthesis Using Kinematic Mapping,” *ASME Journal of Mechanisms, Transmissions and Automation in Design*, 105(3): 460–467, Sept. 1983.
- [30] Rodrigues, O., “Des lois géométriques qui régissent les déplacements d’un système solide dans l’espace, et de la variation des coordonnées provenant de ces déplacements considérés indépendamment des causes qui peuvent les produire” *J. Mathématique Pures et Appliquées*, 5: 380–440, 1840.
- [31] Rooney, J., “A Comparison of Representations of General Spatial Screw Displacements,” *Environment and Planning B*, 5: 45–88, 1978.
- [32] Selig, J.M., *Geometrical Fundamentals of Robotics*, 2nd ed., Springer, New York, 2005.
- [33] Selig, J., “Active versus passive transformations in robotics,” *Robotics & Automation Magazine*, 13(1):79–84, 2006.
- [34] Stramigioli, S., “Nonintrinsicity of References in Rigid-Body Motions,” *ASME Journal of Applied Mechanics*, 68(6): 929–936, 2001.

9 Table Caption List

Table 1: Start and end poses of the moving frame (relative to O).

Table 2: Pose of each frame (relative to the world frame).

Table 3: Pose of each frame (relative to the world frame).

10 Figure Caption List

Figure 1: Demonstrating the three frame scenario with a separate observer frame O for a Humanoid Robot.

Figure 2: Relationship between the frames O , A , B and C .

Figure 3: Translation Vectors ${}^O\mathbf{t}_A$, ${}^O\mathbf{t}_B$, ${}^O\mathbf{t}_C$, ${}^A\mathbf{t}_B$, ${}^B\mathbf{t}_C$.

Figure 4: Demonstration of the Difference Between ${}^W\mathbf{d}_B$ and ${}^W\mathbf{t}_B$, ${}^W\mathbf{d}_C$ and ${}^W\mathbf{t}_C$, ${}^W\mathbf{d}_C$ and ${}^W\mathbf{t}_C$ (Note that ${}^W\mathbf{d}_B = {}^W\mathbf{d}_C = {}^W\mathbf{d}_C = \mathbf{0}$).

Figure 5: Demonstration of ${}^O\mathbf{d}_B$, ${}^O\mathbf{d}_C$, ${}^A\mathbf{d}_C$ and ${}^A\mathbf{t}_B$, ${}^B\mathbf{t}_C$, ${}^A\mathbf{t}_C$.

Figure 6: Transformation of the Observer Frame from O to 1.

Figure 7: Coordinates of All Vectors Computed in Frame 1 Instead of Frame O .

Figure 8: Conjugation Resulting from Changing Body-Fixed Frames.

Figure 9: ${}^O\mathbf{t}_A + {}^O\mathbf{t}_B = {}^A\mathbf{t}_B + {}^B\mathbf{t}_C$.

Figure 10: Comparison of Geodesic Trajectories for $SE(3)$ and $PCG(3)$.

Figure 11: Comparisons of interpolation using multiple frames and two adjacent frames. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses. (a) Multiple frames.

Figure 11: Comparisons of interpolation using multiple frames and two adjacent frames. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses. (b) Adjacent frames.

Figure 12: Comparisons of interpolation by shifting according to the mean of frames. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses. (a) Mean (μ) of frames in $SE(3)$

$$\begin{pmatrix} 0.9659 & 0.2586 & -0.0085 & 7.5 \\ -0.2586 & 0.9638 & -0.0646 & 15 \\ -0.0085 & 0.0646 & 0.9978 & 15 \end{pmatrix}.$$

Figure 12: Comparisons of interpolation by shifting according to the mean of frames. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses. (b) Mean (μ) of frames in $PCG(3)$

$$\begin{pmatrix} 0.9659 & 0.2586 & -0.0085 & 9.6656 \\ -0.2586 & 0.9638 & -0.0646 & 15.9882 \\ -0.0085 & 0.0646 & 0.9978 & 12.2066 \end{pmatrix}.$$

Figure 13: Comparisons of interpolation based on different parameterizations of time steps. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses. (a) Fitted curves based on evenly distributed time steps.

Figure 13: Comparisons of interpolation based on different parameterizations of time steps. Blue dashed: $SE(3)$; Red: $PCG(3)$; Black dotted: lines that connect poses. (b) Fitted curves based on distance-related time steps.